



INTERNATIONAL SEALSKIN™ COMPUTER BLUE LIQUID-TIGHT EX METALLIC CONDUIT (UL LISTED. CSA CERTIFIED. TYPE CBLT)

FEATURES:

- Galvanized steel core for lasting mechanical protection
- Durable, abrasion resistant PVC jacket won't wrinkle or shrink from cut ends
- Complete protection against most liquids and moisture vapor
- Resists sunlight, heat, oil and chemical degradation: Rated: -20° C to +60° C (-5° F to +140° F)
- Extra flexible for extra easy use
- The armor is approved as an equipment ground in sizes 3/8" through 1-1/4"
- Exceptional crush proof qualities
- RoHS WEEE compliant
- Complies with UL standard 360, File number E34028, CSA C22.2 File number LL21229-4, NEC Article 350
- Packaged in handy payout carton
- Accepts standard liquid-tight connectors
- Delivers long-lasting wiring protection
- Bright blue cover easily identifies computer wiring
- Copper bond wire in 3/8" - 1 1/4"
- Smooth interior for easy wire pull-thru

NEC Articles:

- Article 250.118 Equipment Grounding
- Article 300.22 Air Plenum
- Article 350 Liquidtight Flexible Metal Conduit
- Article 501.10, Class I, Div. 2 Classes II and III
- Article 502.10, Class II, Div. 1 & 2
- Article 503.10, Class III, Div. 1&2
- Article 511.7, Above Class I Locations
- Article 620.21 Elevators, Escalators and Platform Lifts
- Article 645.5 Information Technology Equipment
- Article 680.42 Pools, Hot Tubs and Fountains
- Article 695.6 Electrical Fire Pump

USES:


International Sealskin™ Computer Blue gives lasting wiring protection throughout a broad range of computer environments. Also suitable for equipment where rugged and extremely flexible conduit is needed for connections between moving members and stationary parts.

SPECIFICATIONS:

Trade Size And Catalog Number	Acceptable Internal Diameter Min. Max.	Acceptable External Diameter Min. Max.	Bending Radius in Inches	Approx. Weight of 100 Ft.	Approx. Feet Per Standard Pkg.
CBLT-3/8*	0.484 0.504	0.690 0.710	2	27.5	100
CBLT-1/2*	0.622 0.642	0.820 0.840	3-1/4	31	100
CBLT-3/4*	0.820 0.840	1.030 1.050	4-1/4	39	100
CBLT-1*	1.041 1.066	1.290 1.315	6-1/2	70.5	100
CBLT-1-1/4*	1.380 1.410	1.630 1.660	8	94	50
CBLT-1-1/2*	1.575 1.600	1.865 1.900	9	116	50
CBLT-2*	2.020 2.045	2.340 2.375	11	156	50
CBLT-2-1/2†	2.480 2.505	2.840 2.875	14	188	50
CBLT-3†	3.070 3.100	3.460 3.500	17-1/2	300	25
CBLT-3-1/2†	3.500 3.540	3.960 4.000	20	400	25
CBLT-4†	4.000 4.040	4.460 4.500	24	448	25

*Also available on reels. †Special order sizes. Consult factory for lead time.

*Standard length tolerance on packaging +/- 2%

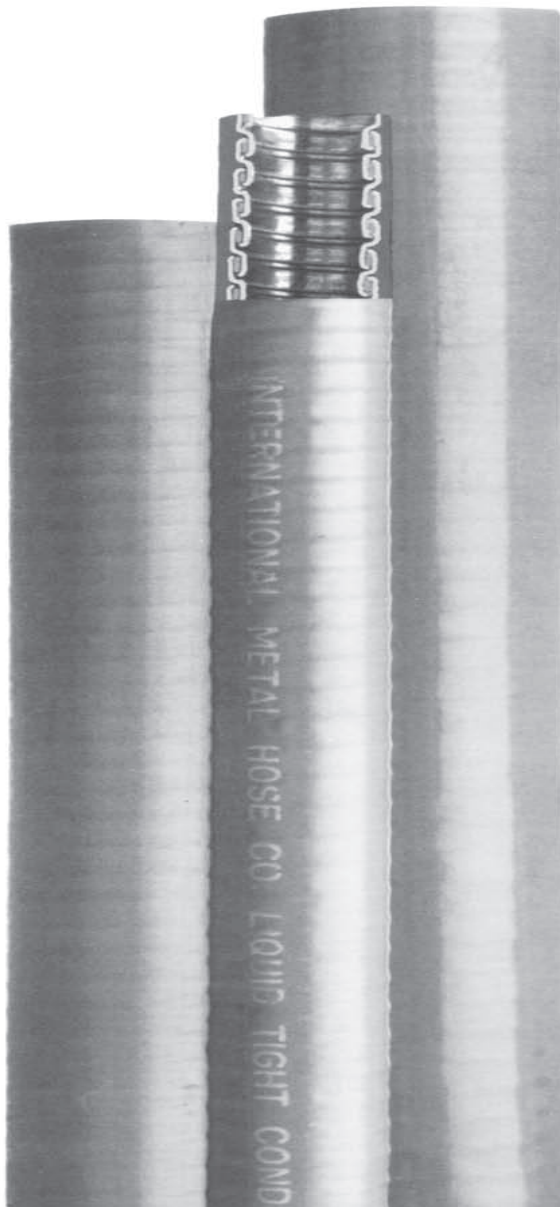

INTERNATIONAL
METAL HOSE COMPANY

**QUALITY MATERIALS • QUALITY MANUFACTURING
QUALITY PERFORMANCE**

520 Goodrich Road – Bellevue, OH 44811-0149 – Phone: 419.483.7690
Fax: 419.483.8225 – Toll Free: 800.458.6855 – www.metalhose.com