



INTERNATIONAL SEALSKIN™ NON-METALLIC LIQUID-TIGHT CONDUIT

(UL LISTED. CSA CERTIFIED. TYPE NMUA)

FEATURES:

- Flexible but tough; crush, abrasion and strain resistant
- Resistant to oil, water and most chemicals
- One-piece construction; no component separation
- Smooth interior finish facilitates easy wire pulling
- Remains flexible from: -20° C to +80° C (-5° F to +176° F)
- RoHS WEEE compliant

- Lightweight; cuts easily and saves labor
- Resists ultraviolet rays
- Installs quickly; cuts easily with a sharp knife
- UL approved for direct burial applications
- Complies with NEC 356
- Suitable for use in hazardous locations per NEC Article 500 Class I, Div. 2; Classes II and III
- Standard package is shrink-wrapped coils

NEC Articles:

- Article 250.102 Equipment Bonding Jumpers
- Article 250.134 (B) Equipment Grounding
- Article 356 Liquid-Tight flexible nonmetallic conduit
- Article 501.10, Class I, Div. 2: Classes II and III
- Article 502.10, Class II, Div. 1 & 2
- Article 503.10, Class III, Div. 1 & 2
- Article 620.21 Elevators, Escalators and Platform Lifts
- Article 680.42 Pools, Hot Tubs and Fountains


USES:

International Sealskin™ Non-Metallic Liquid-Tight Conduit is designed for liquid-tight applications which are subject to vibration, movement, oil and corrosives. It is suitable for indoor and outdoor use, such as outdoor lighting, water treatment systems and HVAC equipment.

SPECIFICATIONS:

Trade Size And Catalog Number	Nominal Internal Diameter	Nominal External Diameter	Bending Radius in Inches	Approx. Weight of 100 Ft.	Approx. Feet Per Standard Pkg.
NMUA-3/8	0.494	0.695	1.5	13	100
NMUA-1/2	0.632	0.865	1.8	13	100
NMUA-3/4	0.830	1.035	3.0	17	100
NMUA-1	1.056	1.297	4.0	26.5	100
NMUA-1-1/4	1.400	1.640	6.0	32	100
NMUA-1-1/2	1.590	1.877	6.5	46	50
NMUA-2	2.035	2.352	11.5	66	50

3/8" - Available in 1500' reels.
 1/2" - Available in 1000' reels.
 3/4" - Available in 700' reels.
 1" - Available in 500' reels.
 Available in grey. Black available on request.
 Standard length tolerance on packaging +/- 2%

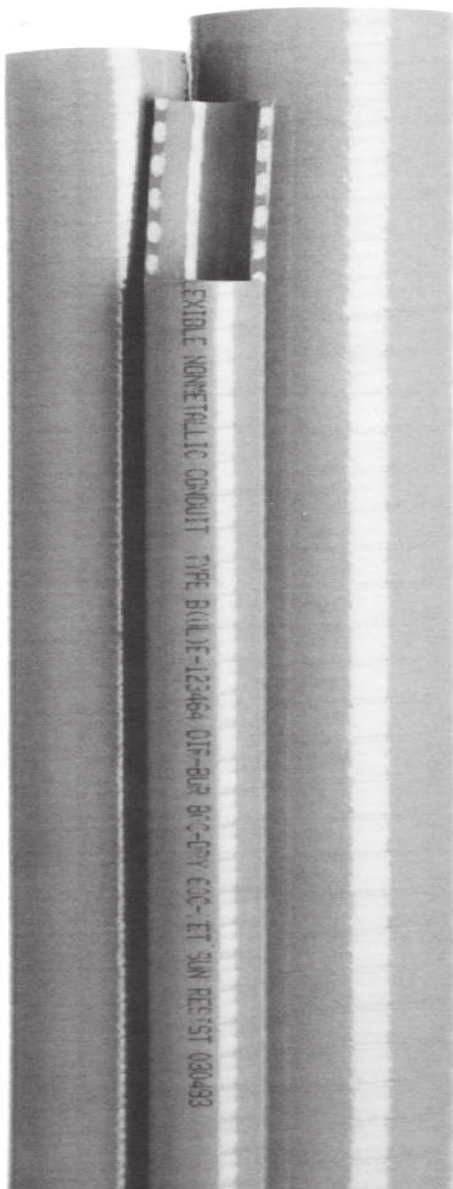

INTERNATIONAL
METAL HOSE COMPANY

QUALITY MATERIALS • QUALITY MANUFACTURING
QUALITY PERFORMANCE

520 Goodrich Road – Bellevue, OH 44811-0149 – Phone: 419.483.7690
 Fax: 419.483.8225 – Toll Free: 800.458.6855 – www.metalhose.com